Plabic graphs and cluster structures on positroid varieties

Slides available at `www.math.berkeley.edu/~msb`

Melissa Sherman-Bennett (UC Berkeley)

joint work with K. Serhiyenko and L. Williams (arXiv:1902.00807)
C. Fraser (arXiv:2006.10247)

UCLA Combinatorics Seminar

Grassmannian background

Fix $0 < k < n$. $[n] := \{1, \ldots, n\}$ and $\binom{[n]}{k} := \{I \subset [n] : |I| = k\}$.

- $Gr_{k,n} := \{V \subset \mathbb{C}^n : \dim V = k\}$.
- $V \in Gr_{k,n} \rightsquigarrow$ full rank $k \times n$ matrix A whose rows span V
- Plücker coordinates: $I \in \binom{[n]}{k}$, $\Delta_I(V) :=$ max'l minor of A in cols I. Satisfy Plücker relations like

$$\Delta_{Sik}\Delta_{SjI} = \Delta_{Sij}\Delta_{SkI} + \Delta_{SiI}\Delta_{Sjk}.$$

Grassmannian background

Fix $0 < k < n$. $[n] := \{1, \ldots, n\}$ and $\binom{[n]}{k} := \{I \subset [n] : |I| = k\}$.

- $Gr_{k,n} := \{V \subset \mathbb{C}^n : \dim V = k\}$.
- $V \in Gr_{k,n} \rightsquigarrow$ full rank $k \times n$ matrix A whose rows span V
- Plücker coordinates: $I \in \binom{[n]}{k}$, $\Delta_I(V) :=$ max'l minor of A in cols I. Satisfy Plücker relations like

$$\Delta_{Sik}\Delta_{SjI} = \Delta_{Sij}\Delta_{SkI} + \Delta_{SiI}\Delta_{Sjk}.$$

- Postnikov, Lusztig: The *totally nonnegative* (TNN) Grassmannian $Gr_{k,n}^{\geq 0} := \{V \in Gr_{k,n} : \Delta_I(V) \geq 0 \text{ for all } I \in \binom{[n]}{k}\}$.

The combinatorics: positroids

$V \in Gr_{k,n}$. The *matroid* of V is $\mathcal{M}_V := \{I \in \binom{[n]}{k} : \Delta_I(V) \neq 0\}$. If V is TNN, $\mathcal{M}_V$ is a *positroid*.

Examples: uniform matroid $\binom{[n]}{k}$, Schubert matroids, lattice path matroids.

Indexed by a menagerie of combinatorial objects.

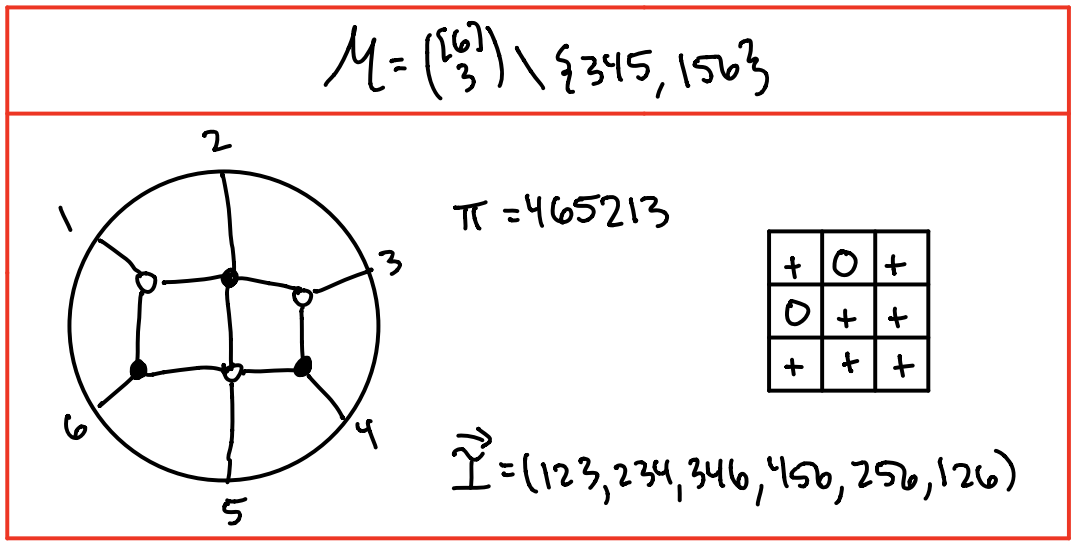

The geometry: positroid varieties

Open positroid variety (Knutson-Lam-Speyer, Lusztig, Rietsch):

$$\Pi^\circ_{\mathcal{M}} := \{V \in Gr_{k,n} : \text{ smallest positroid containing } \mathcal{M}_V \text{ is } \mathcal{M}\}$$

Examples:

$$Gr^\circ_{k,n} = Gr_{k,n} \setminus \{V : \Delta_{12\cdots k}\Delta_{23\cdots k+1}\cdots\Delta_{n1\cdots k-1} = 0\}$$

$$\Pi^\circ_J = \{V : \Delta_J \text{ is lex min nonzero Plücker}\} \setminus \{V : \Delta_J\Delta_{J_2}\cdots\Delta_{J_n} = 0\}$$

(open Schubert variety)

The geometry: positroid varieties

Open positroid variety (Knutson-Lam-Speyer, Lusztig, Rietsch):

$$\Pi^\circ_{\mathcal{M}} := \{V \in Gr_{k,n} : \text{ smallest positroid containing } \mathcal{M}_V \text{ is } \mathcal{M}\}$$

$\Pi^\circ_{\mathcal{M}}$ is cut out of $Gr_{k,n}$ by the equations

$$\Delta_I = 0 \quad \text{for } I \notin \mathcal{M}$$
$$\Delta_{I_1}, \ldots, \Delta_{I_n} \neq 0$$

so $\mathbb{C}[\Pi^\circ_{\mathcal{M}}]$ is $\mathbb{C}[Gr_{k,n}]/\langle \Delta_I : I \notin \mathcal{M} \rangle$ localized at $\Delta_{I_1}, \ldots, \Delta_{I_n}$.

The geometry: positroid varieties

Open positroid variety (Knutson-Lam-Speyer, Lusztig, Rietsch):

$$\Pi^\circ_{\mathcal{M}} := \{V \in Gr_{k,n} : \text{ smallest positroid containing } \mathcal{M}_V \text{ is } \mathcal{M}\}$$

$\Pi^\circ_{\mathcal{M}}$ is cut out of $Gr_{k,n}$ by the equations

$$\Delta_I = 0 \quad \text{for } I \notin \mathcal{M}$$
$$\Delta_{I_1}, \ldots, \Delta_{I_n} \neq 0$$

so $\mathbb{C}[\Pi^\circ_{\mathcal{M}}]$ is $\mathbb{C}[Gr_{k,n}]/\langle \Delta_I : I \notin \mathcal{M}\rangle$ localized at $\Delta_{I_1}, \ldots, \Delta_{I_n}$.

Positive part: $\Pi^\circ_{\mathcal{M}} \cap Gr^{\geq 0}_{k,n} = \{V \in \Pi^\circ_{\mathcal{M}} : \Delta_I > 0 \text{ for } I \in \mathcal{M}\}$.
It is a cell (Postnikov, Rietsch).

Also, many short "subtraction-free" relations hold in $\mathbb{C}[\Pi^\circ_{\mathcal{M}}]$, which give you information about positivity.

Brief overview of cluster algebras

Introduced by Fomin and Zelevinsky (2000). Commutative rings with distinguished generators, defined recursively.

Brief overview of cluster algebras

Introduced by Fomin and Zelevinsky (2000). Commutative rings with distinguished generators, defined recursively.

Ingredients: Start with coordinate ring $\mathbb{C}[V]$.

- Initial *seed* $\Sigma \subset \mathbb{C}[V]$ of *cluster variables* labeling a directed graph.

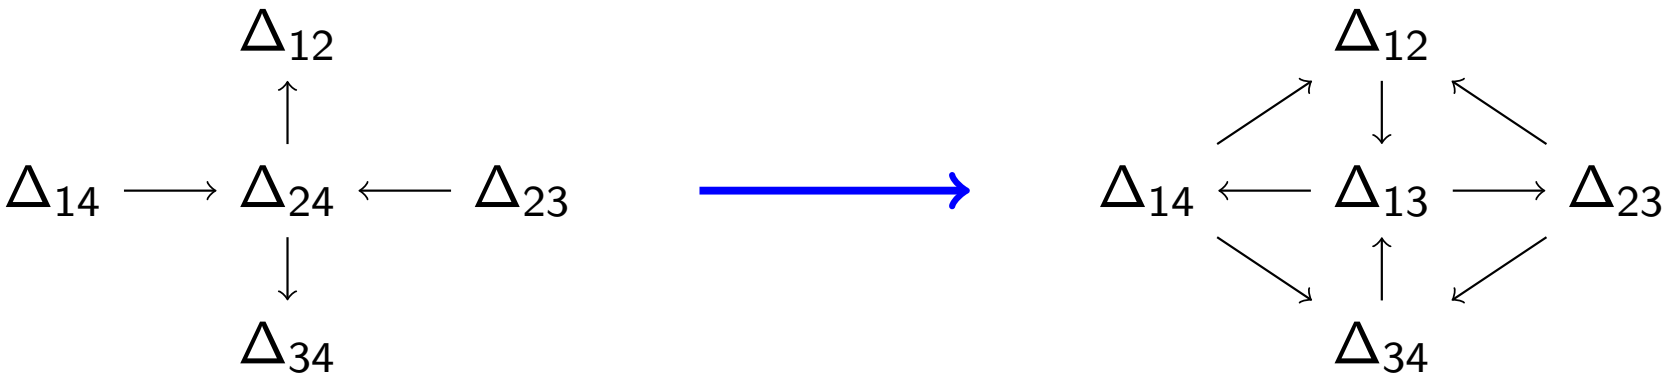

Brief overview of cluster algebras

Introduced by Fomin and Zelevinsky (2000). Commutative rings with distinguished generators, defined recursively.
Ingredients: Start with coordinate ring $\mathbb{C}[V]$.

- Initial *seed* $\Sigma \subset \mathbb{C}[V]$ of *cluster variables* labeling a directed graph.

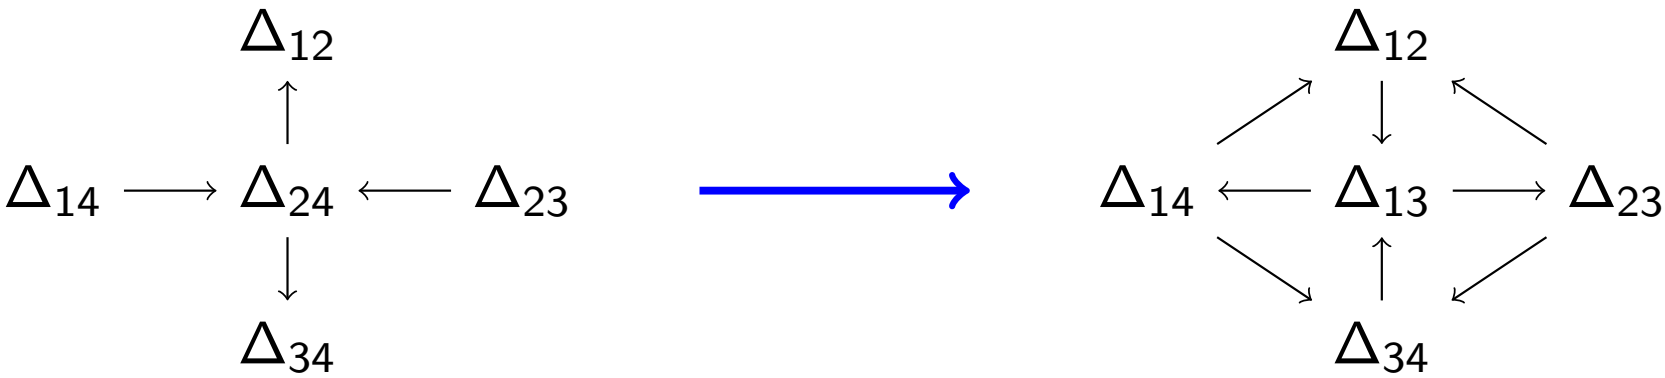

- *Mutation*: local move to get new seed. Cluster variable x is exchanged for new cluster variable x' satisfying $x \cdot x' = A + B$.
- Some variables are *frozen*, so can't mutate them.

Brief overview of cluster algebras

Introduced by Fomin and Zelevinsky (2000). Commutative rings with distinguished generators, defined recursively.
Ingredients: Start with coordinate ring $\mathbb{C}[V]$.

- Initial *seed* $\Sigma \subset \mathbb{C}[V]$ of *cluster variables* labeling a directed graph.

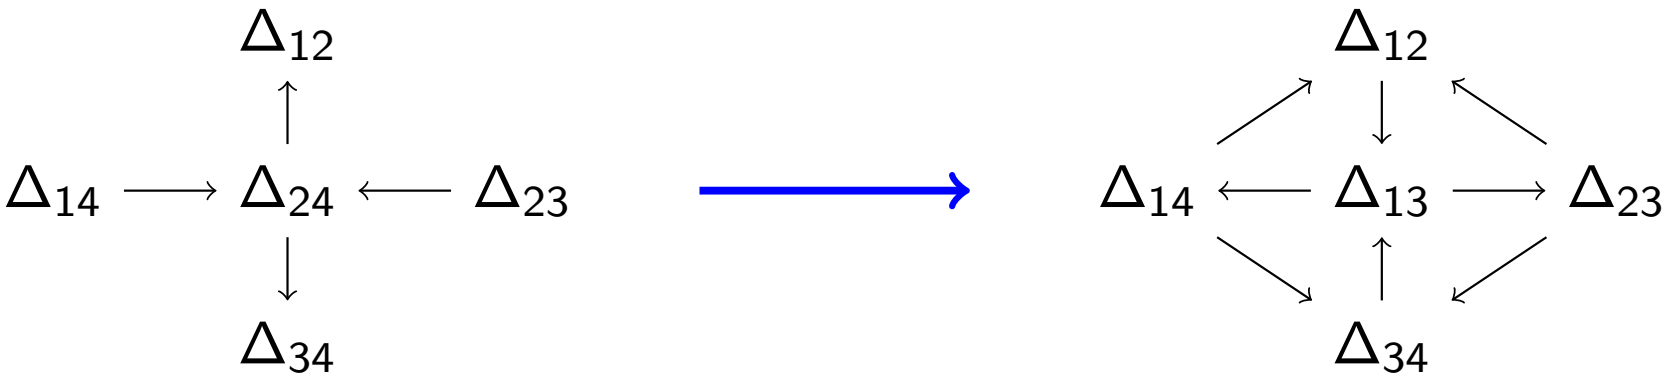

- *Mutation*: local move to get new seed. Cluster variable x is exchanged for new cluster variable x' satisfying $x \cdot x' = A + B$.
- Some variables are *frozen*, so can't mutate them.

Cluster algebra $\mathcal{A}(\Sigma) := \mathbb{C}[\text{frozen variables}^{\pm 1}][\text{cluster variables}]$.

Brief overview of cluster algebras

Introduced by Fomin and Zelevinsky (2000). Commutative rings with distinguished generators, defined recursively.
Ingredients: Start with coordinate ring $\mathbb{C}[V]$.

- Initial *seed* $\Sigma \subset \mathbb{C}[V]$ of *cluster variables* labeling a directed graph.

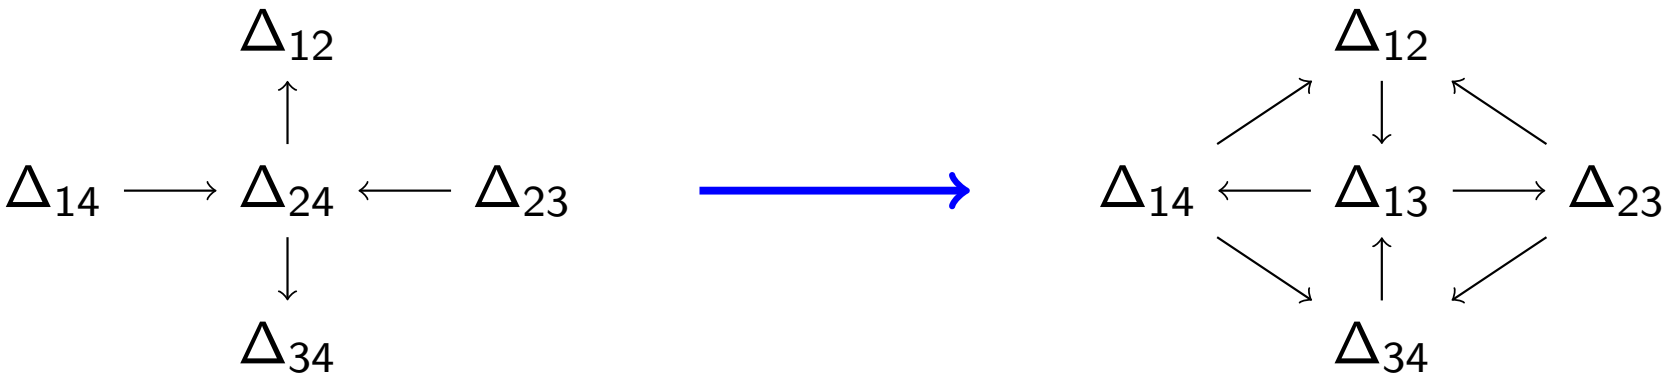

- *Mutation*: local move to get new seed. Cluster variable x is exchanged for new cluster variable x' satisfying $x \cdot x' = A + B$.
- Some variables are *frozen*, so can't mutate them.

Cluster algebra $\mathcal{A}(\Sigma) := \mathbb{C}[\text{frozen variables}^{\pm 1}][\text{cluster variables}]$.
$\mathbb{C}[V]$ is a cluster algebra if $\mathbb{C}[V] = \mathcal{A}(\Sigma)$ for some seed Σ.

What to remember about cluster algebras

- *Cluster monomials* (monomials in elements of a seed, inverses of frozens allowed) are part of a basis for $\mathcal{A}(\Sigma)$ with positive structure constants (Gross-Hacking-Keel-Kontsevich).
- All cluster variables can be written as subtraction-free rational expressions in initial cluster variables. So initial seed is positive $\Longrightarrow$ all cluster variables positive.

What to remember about cluster algebras

- *Cluster monomials* (monomials in elements of a seed, inverses of frozens allowed) are part of a basis for $\mathcal{A}(\Sigma)$ with positive structure constants (Gross-Hacking-Keel-Kontsevich).
- All cluster variables can be written as subtraction-free rational expressions in initial cluster variables. So initial seed is positive $\Longrightarrow$ all cluster variables positive.

Basic problems: Show $\mathbb{C}[V]$ is a cluster algebra. Then explicitly describe as many cluster monomials (equivalently, seeds) as possible.

Grassmannian case

Theorem (Scott '06)

$\mathbb{C}[Gr_{k,n}^{\circ}]$ is a cluster algebra and Postnikov's plabic graphs for $Gr_{k,n}^{\circ}$ give seeds (consisting entirely of Plücker coordinates).

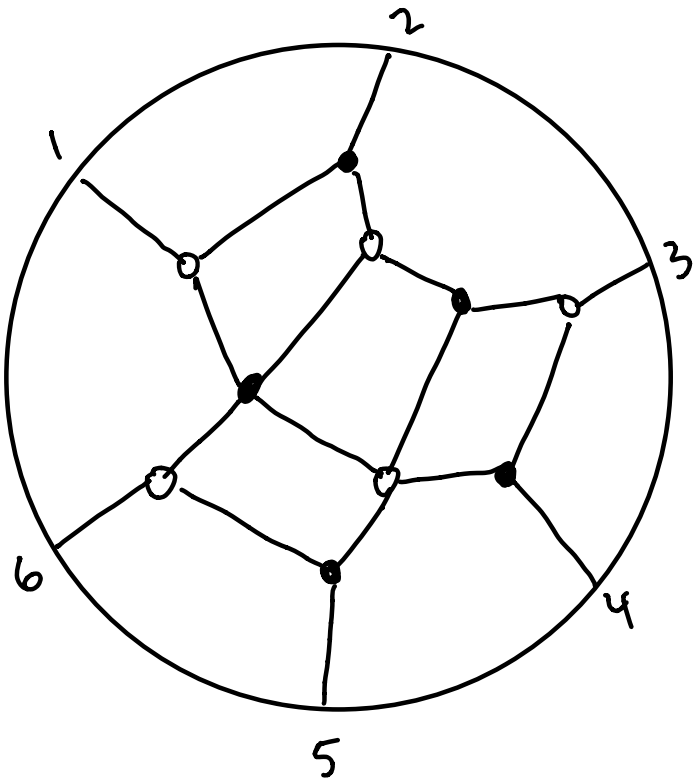

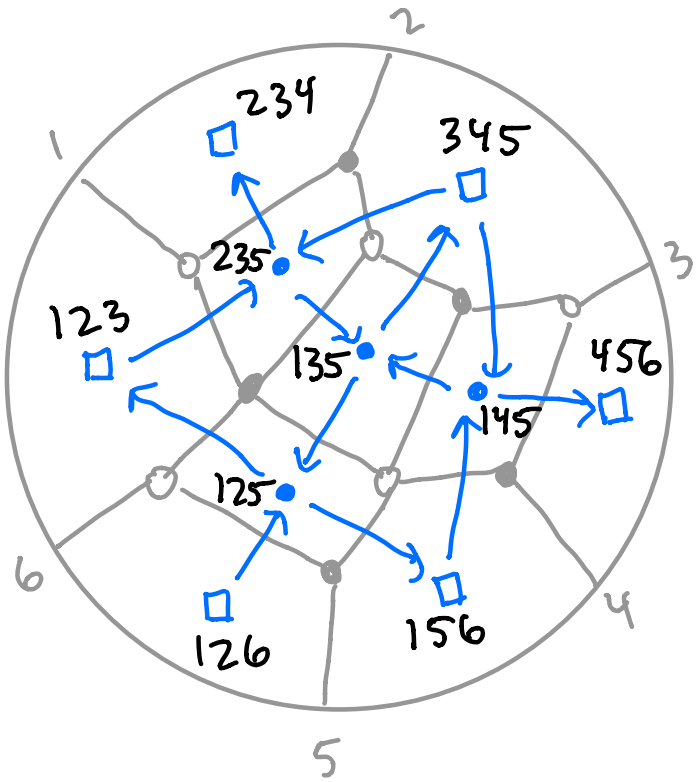

Grassmannian case

Theorem (Scott '06)

$\mathbb{C}[Gr^{\circ}_{k,n}]$ is a cluster algebra and Postnikov's plabic graphs for $Gr^{\circ}_{k,n}$ give seeds (consisting entirely of Plücker coordinates).

Conjecture (Muller-Speyer '16)

Analog of Scott's result should hold for open positroid varieties $\Pi^{\circ}_{\mathcal{M}}$.

Cluster algebra structure for positroid varieties

Theorem (Serhiyenko-SB-Williams '19)

Let Π_J° be an open Schubert variety. Then plabic graphs for Π_J° give seeds for a cluster algebra structure on $\mathbb{C}[\Pi_J^\circ]$.

Key tool: work of Leclerc on Richardson varieties in $Fl_n \implies \mathbb{C}[\Pi_J^\circ]$ a cluster algebra.

Cluster algebra structure for positroid varieties

Theorem (Serhiyenko-SB-Williams '19)

Let Π_J° be an open Schubert variety. Then plabic graphs for Π_J° give seeds for a cluster algebra structure on $\mathbb{C}[\Pi_J^\circ]$.

Key tool: work of Leclerc on Richardson varieties in $Fl_n \implies \mathbb{C}[\Pi_J^\circ]$ a cluster algebra.

Theorem (Galashin-Lam '19)

$\mathbb{C}[\Pi_{\mathcal{M}}^\circ]$ *is a cluster algebra, and plabic graphs for $\Pi_{\mathcal{M}}^\circ$ give seeds.*

Cluster algebra structure for positroid varieties

Theorem (Serhiyenko-SB-Williams '19)

Let Π°_J be an open Schubert variety. Then plabic graphs for Π°_J give seeds for a cluster algebra structure on $\mathbb{C}[\Pi^\circ_J]$.

Key tool: work of Leclerc on Richardson varieties in $Fl_n \implies \mathbb{C}[\Pi^\circ_J]$ a cluster algebra.

Theorem (Galashin-Lam '19)

$\mathbb{C}[\Pi^\circ_{\mathcal{M}}]$ is a cluster algebra, and plabic graphs for $\Pi^\circ_{\mathcal{M}}$ give seeds.

Cluster algebra structure picks out the "right" positive part:
$\{V \in \Pi^\circ_{\mathcal{M}} : \text{ all cluster variables are positive on } V\} = \Pi^\circ_{\mathcal{M}} \cap Gr^{\geq 0}_{k,n}$.
Plabic graphs give positivity tests.

A bit more on seeds from plabic graphs

A *plabic graph* G of type (k, n): planar, embedded in disk, boundary vertices $1, \ldots, n$ going clockwise, internal vertices colored black and white.

To get a seed Σ_G:

- Directed graph is dual graph (boundary faces are frozen).
- For cluster: use *trips* to label faces.
  - For trip $i \rightsquigarrow j$, put the *target* j in faces to left of trip.

  Every face labeled by k-elt subset, which we interpret as Plücker coordinate.

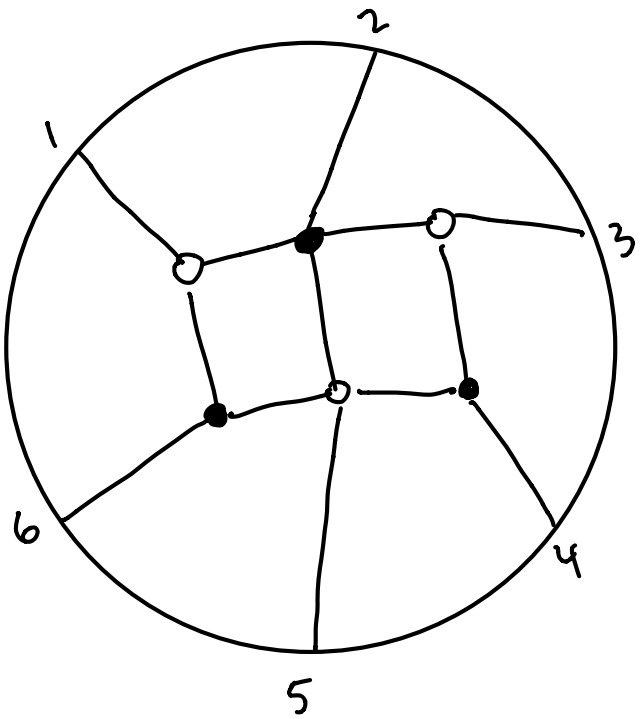

Trip permutation μ tells you which positroid variety G is a plabic graph for. All seeds Σ_G, where G has trip permutation μ, are related by mutation.

A bit more on seeds from plabic graphs

A *plabic graph* G of type (k, n): planar, embedded in disk, boundary vertices $1, \ldots, n$ going clockwise, internal vertices colored black and white.

To get a seed Σ_G:

- Directed graph is dual graph (boundary faces are frozen).
- For cluster: use *trips* to label faces.
  - For trip $i \rightsquigarrow j$, put the *target* j in faces to left of trip.

  Every face labeled by k-elt subset, which we interpret as Plücker coordinate.

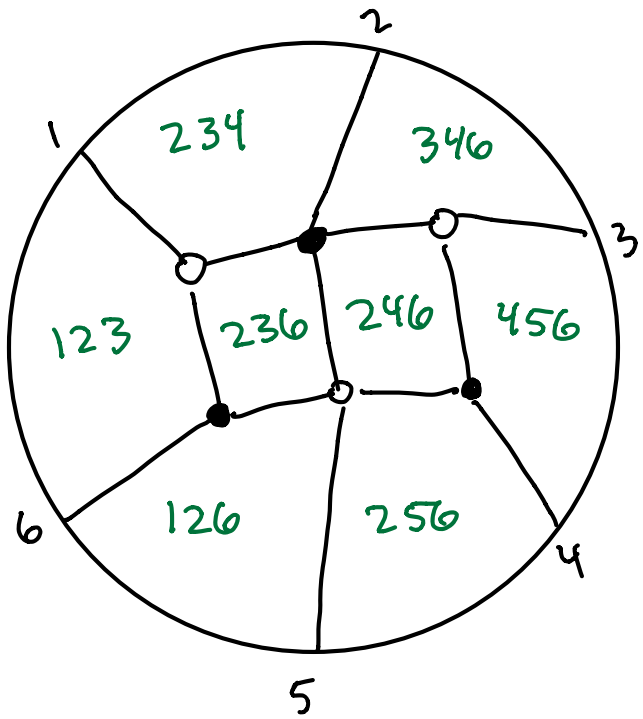

Trip permutation μ tells you which positroid variety G is a plabic graph for. All seeds Σ_G, where G has trip permutation μ, are related by mutation.

A bit more on seeds from plabic graphs

A *plabic graph* G of type (k, n): planar, embedded in disk, boundary vertices $1, \ldots, n$ going clockwise, internal vertices colored black and white.

To get a seed Σ_G:

- Directed graph is dual graph (boundary faces are frozen).
- For cluster: use *trips* to label faces.
  - For trip $i \rightsquigarrow j$, put the *target* j in faces to left of trip.

  Every face labeled by k-elt subset, which we interpret as Plücker coordinate.

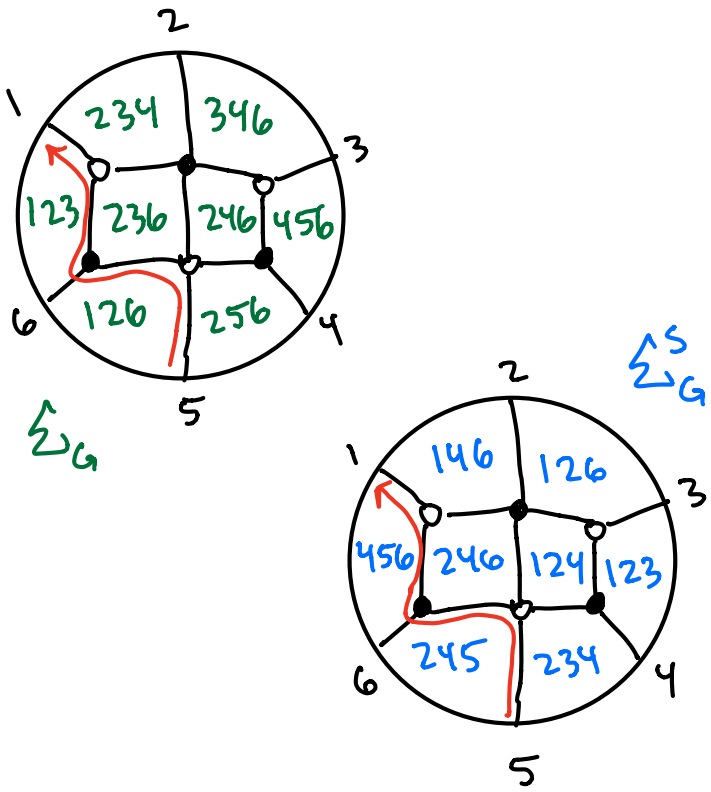

Trip permutation μ tells you which positroid variety G is a plabic graph for. All seeds Σ_G, where G has trip permutation μ, are related by mutation.

Puzzles for Π_μ°

For $\Pi_\mu^\circ \neq Gr_{k,n}^\circ$:

1. Many nonzero P_I do not show up in any plabic seed.
2. $\exists$ seeds whose cluster variables are $P_I \cdot$(*Laurent monomial in frozens*), but don't know combinatorial "source".
3. No sequence of mutations between Σ_G^S and Σ_G! Two convention choices for plabic seeds give different cluster algebras $\mathcal{A}(\Sigma_G)$ and $\mathcal{A}(\Sigma_G^S)$.

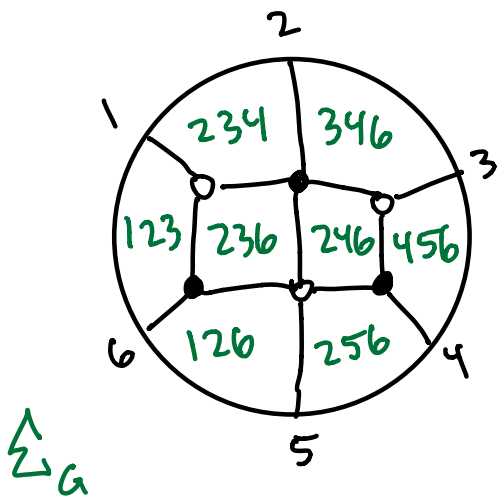

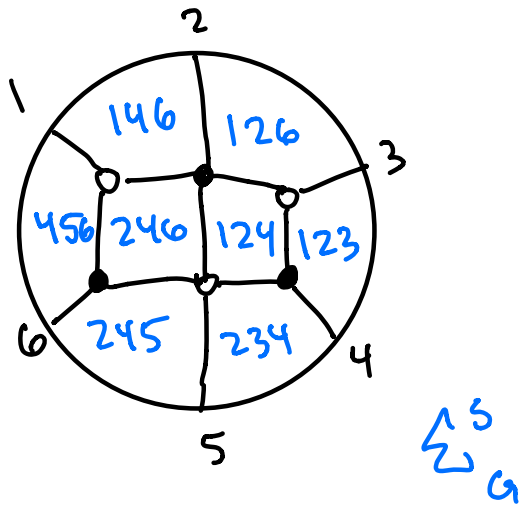

Main results

Theorem (Fraser–SB '20)

$\mathbb{C}[\Pi^\circ_\mu]$ can be identified with many different cluster algebras (with different frozen and cluster variables), with seeds given by certain relabeled plabic graphs with trip permutation μ.

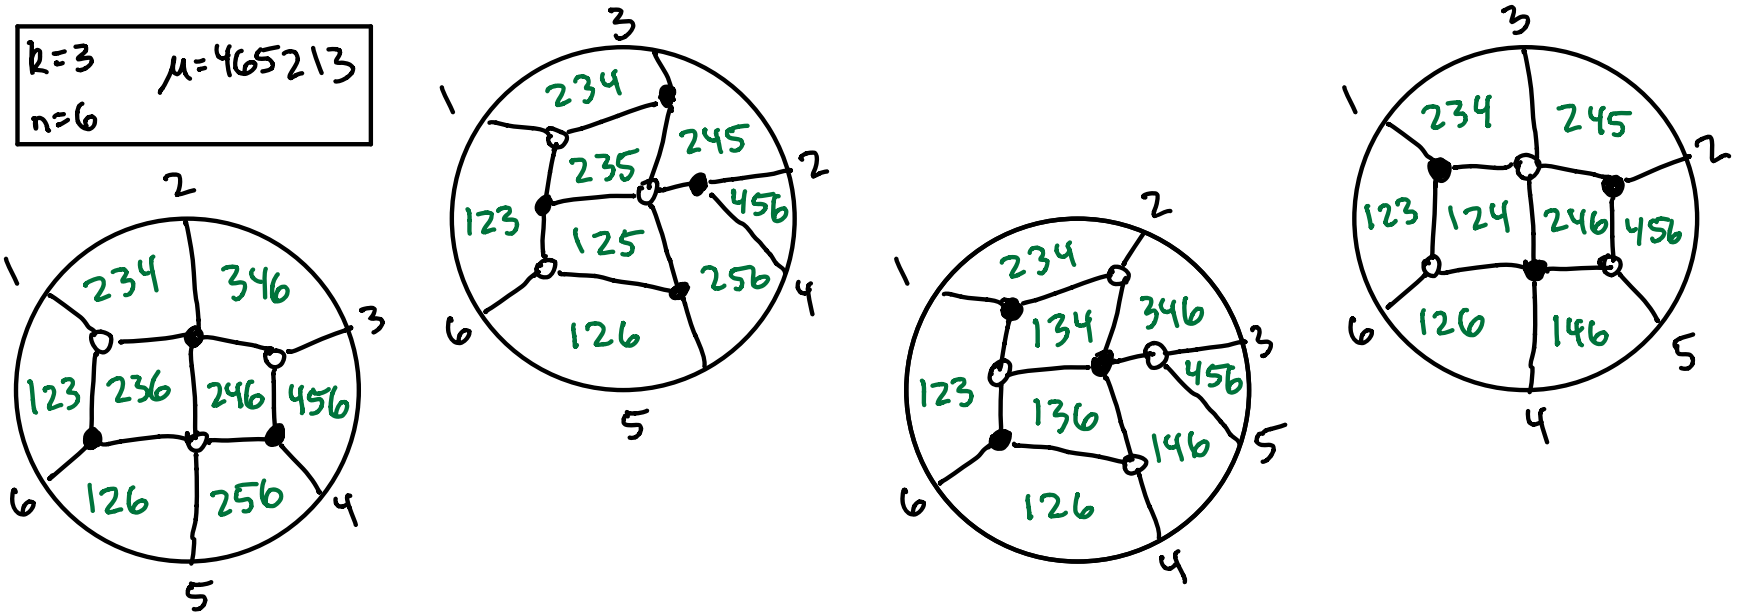

Relabeled plabic graphs

G a plabic graph of type (k, n), $v \in S_n$. The *relabeled plabic graph* G^v is obtained from G by applying v to its boundary vertex labels.

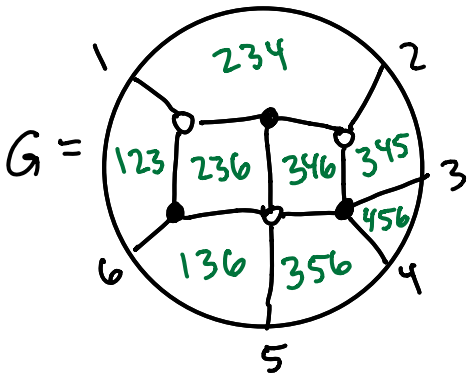

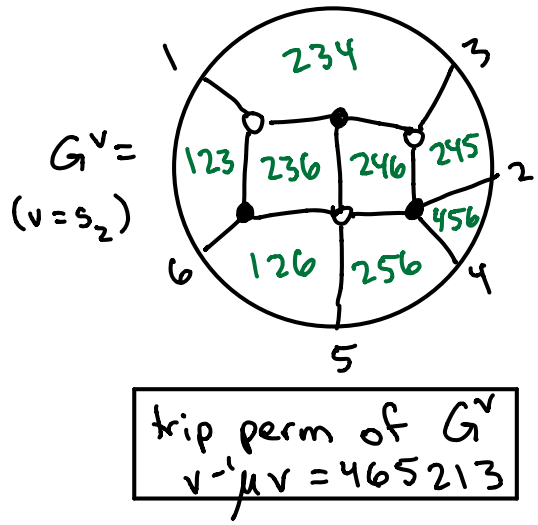

Trip permutation, face labels, seed of G^v computed according to its boundary labels.

Note: The "source" seed Σ_G^S is the same as $\Sigma_{G(\mu^{-1})}$.

More precisely...

Theorem (Fraser–SB '20)

Let G^ν be a relabeled plabic graph with trip permutation μ where $\mu\nu \leq \mu$ in the circular weak order. The following are equivalent.

1. $\mathcal{A}(\Sigma_{G^\nu}) = \mathbb{C}[\Pi^\circ_\mu]$.
2. $\#(\textit{faces of } G^\nu) = \dim \Pi^\circ_\mu + 1$.
3. *The face labels of G^ν are weakly separated.*

Proving (2) $\implies$ (1) involves showing $\Pi^\circ_{\nu\mu\nu^{-1}} \cong \Pi^\circ_\mu$ using a permuted version of the Muller-Speyer twist map τ. The permuted double twist $\tau^2 \circ \nu$ sends Σ^S_G to Σ_{G^ν} (up to frozens).

Main results

Theorem (Fraser–SB '20)

$\mathbb{C}[\Pi_\mu^\circ]$ can be identified with many different cluster algebras (with different frozen and cluster variables), with seeds given by certain relabeled plabic graphs with trip permutation μ.

Main results

Theorem (Fraser–SB '20)

$\mathbb{C}[\Pi_\mu^\circ]$ can be identified with many different cluster algebras (with different frozen and cluster variables), with seeds given by certain relabeled plabic graphs with trip permutation μ.

Theorem (Fraser–SB '20)

For open Schubert varieties Π_J°, these cluster algebras are "the same up to frozens" and have same cluster monomials. The relabeled graph seeds can be rescaled by frozens to get seeds in $\mathcal{A}(\Sigma_G)$.

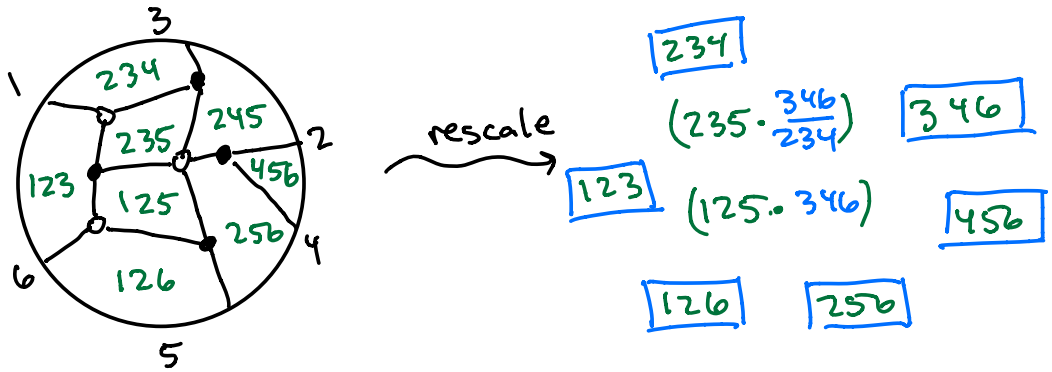

Main results

Theorem (Fraser–SB '20)

$\mathbb{C}[\Pi_\mu^\circ]$ can be identified with many different cluster algebras (with different frozen and cluster variables), with seeds given by certain relabeled plabic graphs with trip permutation μ.

Theorem (Fraser–SB '20)

For open Schubert varieties Π_J°, these cluster algebras are "the same up to frozens" and have same cluster monomials. The relabeled graph seeds can be rescaled by frozens to get seeds in $\mathcal{A}(\Sigma_G)$.

Conjecture (Fraser–SB '20)

Above theorem holds for arbitrary Π_μ°.

Partial results for Π_μ°, including that relabeled plabic graphs give positivity tests.

Summary & questions

Takeaway: Relabeled plabic graphs with trip perm μ give many additional explicit seeds in the target cluster structure, with cluster variables $P_I \cdot$(Laurent mono. in frozens).

Summary & questions

Takeaway: Relabeled plabic graphs with trip perm μ give many additional explicit seeds in the target cluster structure, with cluster variables $P_I \cdot$(Laurent mono. in frozens).

Questions:

- Let Σ be a seed in target cluster structure on $\mathbb{C}[\Pi_\mu^\circ]$ with cluster variables $\{P_I \cdot (\text{Laurent mono. in frozens})\}$. Does Σ come from rescaling a relabeled plabic graph seed?
- Are all Plücker coordinates in $\mathbb{C}[\Pi_\mu^\circ]$ cluster monomials? From a relabeled plabic graph seed?
- Relabeled versions of other combinatorial objects indexing positroids?
- Characterization of relabeled plabic graph seeds?

Thanks for listening!

arXiv:1902.00807
arXiv:2006.10247
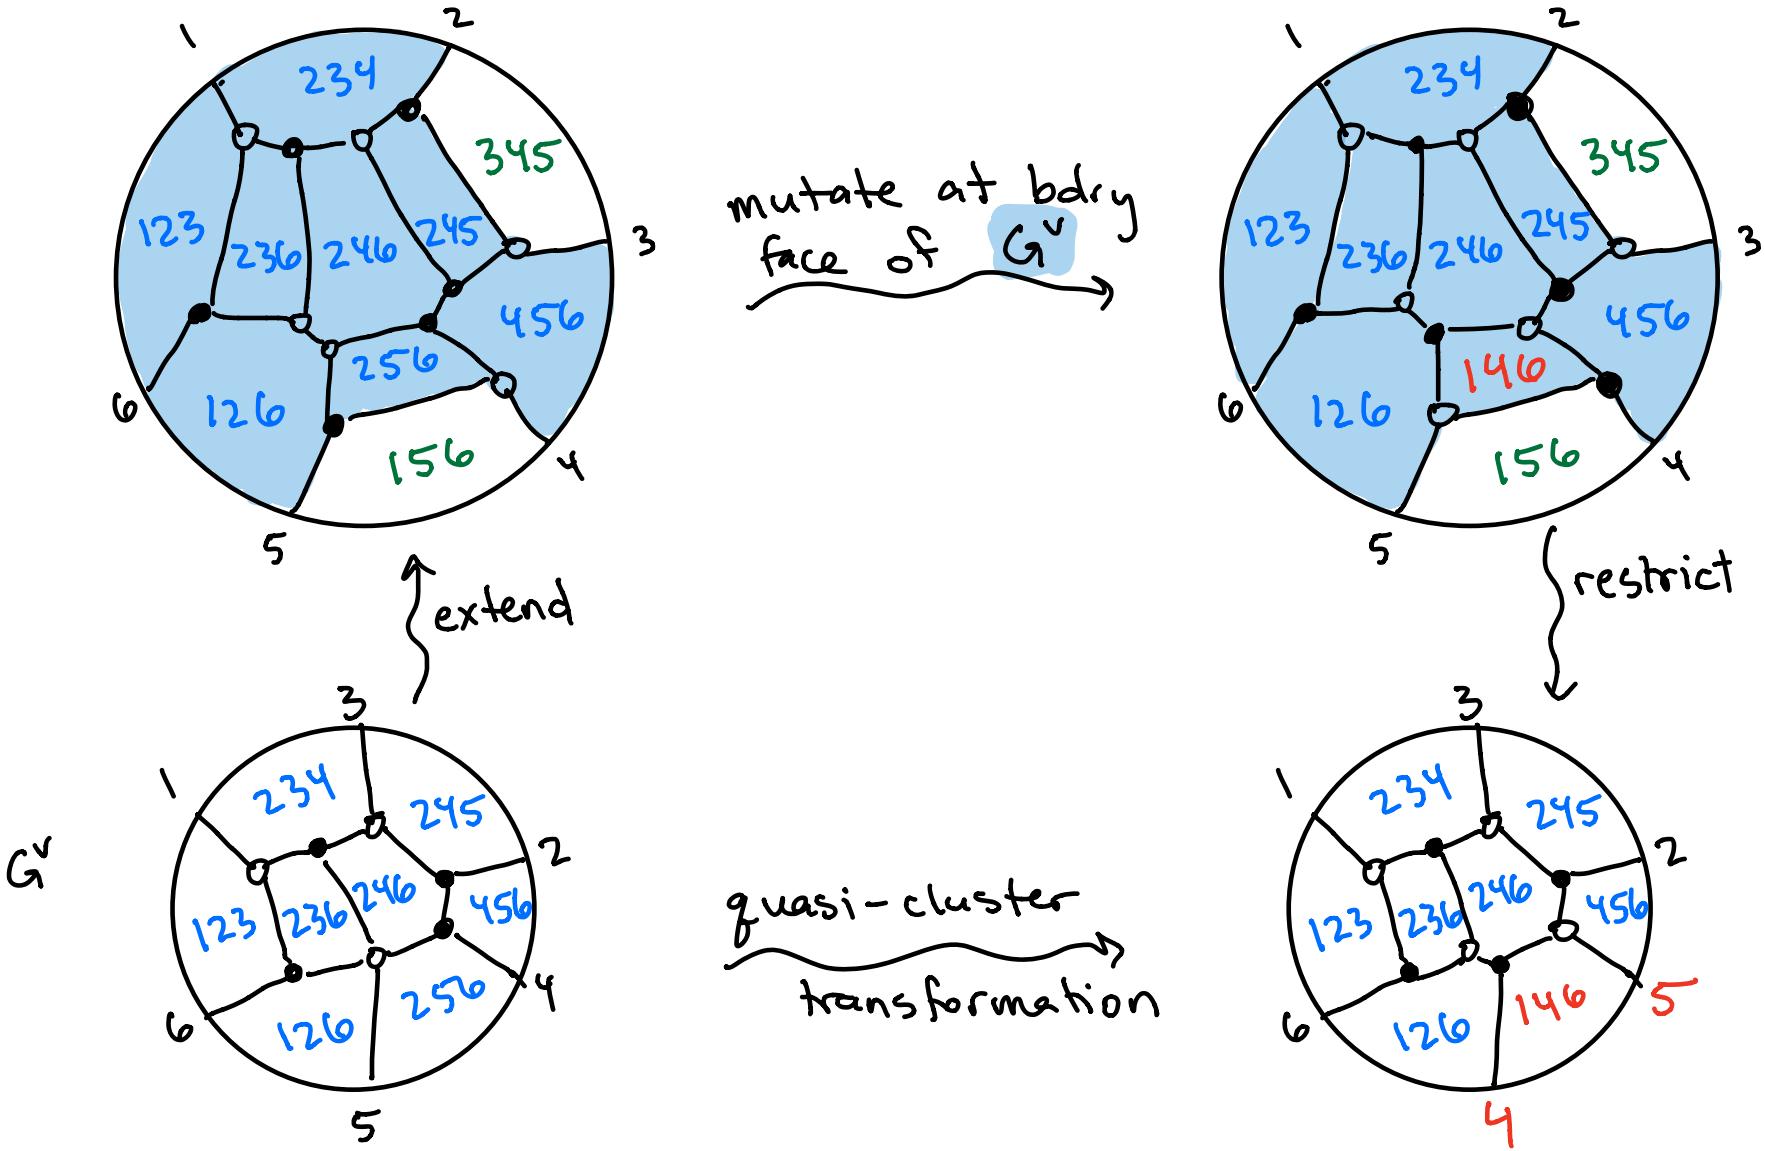
Proof technique: "Mutating at frozens"